

# Wi-SOS 480 Wireless Monitoring System

London Underground  
Approved Product  
ID 3576

- Long-range 800MHz radio
- No system planning
- No repeaters
- Instant data access
- Android technology
- Saves installation costs



# Wi-SOS 480 Wireless Monitoring System



## Overview



The Wi-SOS 480 (Wireless Sensor Observation System) provides a system to transmit, receive and data log remotely signals from any sensor with a vibrating wire, voltage, 4-20mA, SDI12 or resistance output over long ranges up to 15 km.

Stand-alone Wireless Tilt Meters are also available which can be integrated into the system, together with any type of Node. The user can configure, diagnose, and download from a mobile device using android technology.

The Wi-SOS 480 is a star network consisting of a series of wireless nodes and a gateway. The gateway collects the data from the long-range star network, stores it locally and it is available to view and/or download via GPRS, wired Ethernet or Wi-Fi. No system planning is required and repeaters are not required, saving on installation costs.

What makes Wi-SOS 480 different to other wireless systems is the use of data modulation via the WorldSensing G6 Platform which uses the latest LoRa spread spectrum technology. This technology means long range, low cost, low power consumption and high connectivity.

Software is embedded in the gateway, which allows it to be fully configurable over air or Ethernet and a fast mode allows full diagnostics to ensure correct operation of the system.

The Wi-SOS 480 Web Centre provides a platform to download data and view it on PC, tablet or mobile phone; or the data can be forwarded to any FTP for inputting into most visualisation software.

The Wi-SOS 480 offers a highly flexible and cost-effective solution for projects where a cabled solution is not possible due to physical barriers and/or access restrictions and where near real-time monitoring is required.

## APPLICATIONS

Wireless connection to sensors such as:

Tilt meters

Crack meters

Piezometers

Strain Gauges

Load cells

Total pressure cells

NATM stress cells

Rod extensometers

Crack meters

Joint meters

Settlement cells

Temperature sensors

V-Notch weirs

## FEATURES

Long-range 868/915MHz radio

Low-power LoRa® spread spectrum technology

London Underground approved product

Easy configuration

No repeaters

Instant data access

Android technology

Long range communication up to 15 km

Up to 10 years battery life

User-friendly configuration with Android device

Vibrating wire, Digital & Analogue sensor input options

Robust, small and weather-proof box for harsh environments

# Wi-SOS 480 Wireless Monitoring System

## Specifications

### ANALOGUE NODE 4 CH

Each channel is individually configured by the user. Equipped with a control port for operating a distributed multiplexer.

#### VOLTAGE

Measuring ranges [V DC]	$\pm 10 ; \pm 1.25 (8x)$
Accuracy (-40 to +85°C)	$\pm 0.05 \% FS$

#### CURRENT LOOP (2-3 WIRES)

Measuring range	4-20 mA
Accuracy (0 to +50°C)	$\pm 0.05 \% FS$

#### POTENTIOMETER

Accuracy (0 to +50°C)	$\pm 0.02 \% FS$
-----------------------	------------------

#### FULL WHEATSTONE BRIDGE

Accuracy (0 to +85°C)	$\pm 0.1 \% FS$
-----------------------	-----------------

#### THERMISTOR

Accuracy (0 to +50°C)	$\pm 0.2^{\circ}C$
-----------------------	--------------------

#### PT 100

Accuracy (20°C)	$\pm 0.8^{\circ}C$
-----------------	--------------------

### VIBRATING WIRE NODE 1 CH AND 5 CH

#### VIBRATING WIRE

Measurement method	Embedded algorithms increasing immunity to noise
Excitation wave	$\pm 5 V$
Measurement range	300 to 7,000 Hz
Resolution (-40 to +85°C)	0.12 Hz
Accuracy (-40 to +85°C)	0.018 % FS

#### THERMISTOR

Measurement range	0 ohm to 4 Mohm
Resolution	1 ohm
Accuracy (20°C)	0.05°C (0.04 % FS)

#### BAROMETER

Pressure Range	300 to 1,100 hPa
Relative Accuracy (950 to 1,050 hPa at 25°C)	$\pm 0.12 hPa$



# Wi-SOS 480 Wireless Monitoring System



## Specifications

### DIGITAL NODE

Channels	One RS485 channel and two SDI-12 channels
Power supply	12 V DC up to 120 mA
RS-485	Full or half duplex supported
Suitable for a chain of up to 30 biaxial in-place inclinometers	
ModbusRTU RS485	

### WIRELESS TILT METER (NODE)

Range	$\pm 15^\circ$
Accuracy ( $\pm 5^\circ$ )	0.3% FS / 0.004°
Accuracy full range	0.17% FS / 0.025°
Resolution	0.001°
Axes	Biaxial

### DATA STORAGE & POWER

#### INTERNAL DATA STORAGE

Up to 72,500 readings, including time and 5 sensors

Up to 200,000 readings, including time and 1 sensor

#### POWER

Internal standard C-size batteries. 1 to 4 batteries, depending on usage

BATTERY LIFE ESTIMATION	5 MIN INTERVALS	HOURLY INTERVALS
5 - channel vibrating wire	7 years	>10 years
4 - channel analogue (FWB/TH/POT/PT100)	6 months	> 5 years
Digital bus (15 biaxial sensors)	3 months	~ 2.5 years

#### SIZE

1 channel	145 x 105 x 61 mm
2 to 5 channels	145 x 220 x 61 mm

#### WEIGHT

1 channel	850g without batteries
2 to 5 channels	1100g without batteries

**ENCLOSURE** Aluminium alloy

**TEMPERATURE RANGE** -40 to +85 °C

**RATING** IP67, Higher protection on request

# Wi-SOS 480 Wireless Monitoring System

## Specifications

### GATEWAY

ISM Sub 1 GHz band, sensitivity up to -137 dBm

Detachable omnidirectional  $\frac{1}{2}$   $\lambda$  dipole

Integrated GPS antenna

GNSS High Sensitivity GPS module

### POWER

Power supply: 48 V DC PoE

Nominal: 3 Watts

DC power supply (ex.: solar panel use): 11 to 30 Volts

### PHYSICAL PROPERTIES

Size: 210 x 310 x 170 including mounting kit

Weight: 2 kg including mounting kit

IP67 rating

Operating range: -20 to + 60 °C

### NETWORK INTERFACES

10/100 Ethernet WAN (RJ45 PoE)

Integrated 3G Modem & Antenna (HSDPA, EDGE, GPRS) quad band

### CONFIGURATION APP

Simple and fast connection to datalogger

Runs only on Android devices

Easy sensor configuration: ID, sampling rate, sweep, etc.

Checks radio signal coverage & records coordinates (GPS)

Downloads data & sends by e-mail or saves it on the Android device

Takes current reading

Updates datalogger firmware

# Wi-SOS 480 Wireless Monitoring System



## Specifications

### WEB PLATFORM/SOFTWARE

#### NETWORK AND ASSET MANAGEMENT SOFTWARE

Network communications configuration and control

Datalogger and sensor attributes display

Datalogger configuration

Sensor data in real time

Conversion of raw sensor data in engineering units

Manual and automatic data download in .csv

Data transmitted in a secure manner

Sensor data visualisation and download (tables and graphs)

Topological view

Creation of virtual variables

Configuration of alarm thresholds

Alarms sent to stakeholders by email

Automatically generated reports (tables, graphs and notes)

### RADIO SPECS

ISM sub 1 GHz operating frequency bands adjustable to territory requirements

No repeaters needed

Sensitivity : up to -137 dBm

Transmission: +14 dBm high efficiency / +20 dBm


Maximum link budget: 151 dB

Remote sampling rate change

### RANGES

#### LONG RANGE RADIO

Open field	15 Km
Urban	4 Km
Manhole (Urban)	2 Km
Tunnel	4 Km

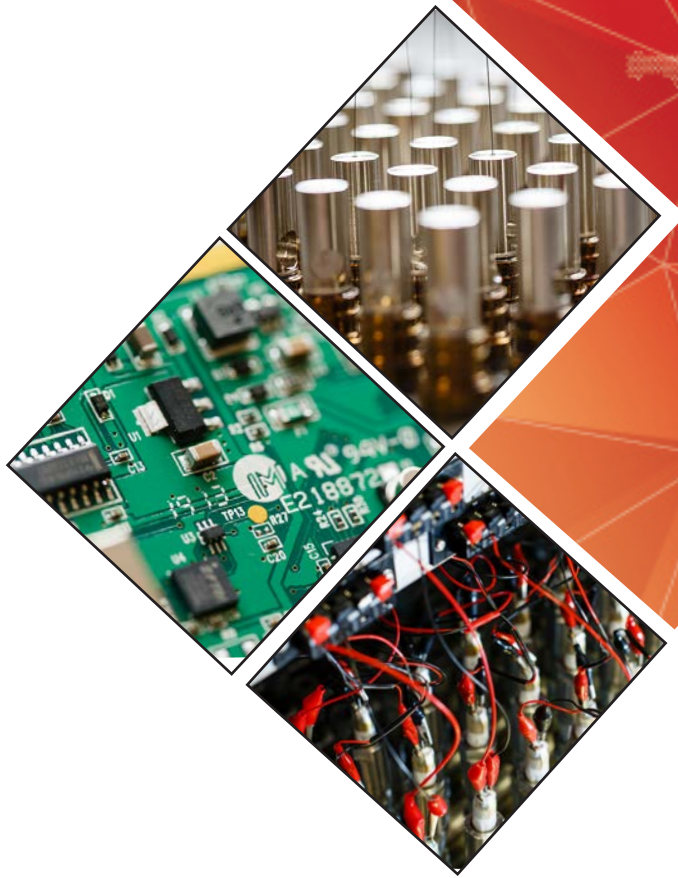

Geosense Ltd, Nova House, Rougham Industrial Estate, Rougham, Bury St Edmunds, Suffolk IP30 9ND, England

[www.geosense.co.uk](http://www.geosense.co.uk) e [sales@geosense.co.uk](mailto:sales@geosense.co.uk) t +44(0)1359 270457